

**ADDENDUM NO. 2:**

Date: January 31, 2018  
Project: City Hall Renovations for the Accounting and Finance Department  
Owner: The City of Tuscaloosa  
Owner's Project Number: A17-1508  
Architect: Ward Scott Architecture, Inc.

This Addendum forms a part of the Contract Documents and modifies the original Bid Documents dated January 4, 2018, as noted below.

Acknowledge receipt of this Addendum in the location provided on the Bid Proposal Form.

**1.1 GENERAL**

- A. The receipt and opening of bids for this project has been rescheduled for **Thursday, February 8, 2018 at 10:00 AM**. The location for the bid opening of the Tuscaloosa City Hall Council Chambers, 2201 University Boulevard, Tuscaloosa, Alabama remains unchanged.
- B. Refer to attached Smith, Stegall, and Associates Addendum

**1.2 SPECIFICATIONS**

- A. Refer to Specification 012300 Revise Section 3.1.A.2 as follows:
  2. Alternate: Replace carpet at all rooms that are currently carpeted. Furniture will be removed from space by owner at Open Office Area 3210 prior to carpet replacement. Include furniture removal and installation at Office 3211, Library 3212 and Conference Room adjacent to Open office 3202 in the Alternate Price Proposal. Carpet material price shall be per Allowance No. 02.

**1.3 DRAWINGS**


- A. N/A

**1.4 ATTACHED TO ADDENDUM**

- A. Smith, Stegall, and Associates Addendum.

**END OF ADDENDUM**

# ADDENDUM



Smith, Stegall & associates p.c.

Consulting Engineers

2110 Eighth Street, Tuscaloosa, AL 35401

Phone/ Fax 205 345 4402

PROJECT: <b>City of Tuscaloosa Departmental Renovations - Phase 2</b>	ENG JOB # <b>1744</b>	DATE: <b>January 31, 2018</b>
--	--------------------------	----------------------------------


## ELECTRICAL:

1. **Sheet E001, Symbols List:** See attached electrical drawing 1 of 1 for clouded revisions.
2. **Sheet E101:** See attached sheet for clouded revisions.
3. **Sheet E102:** See attached sheet for clouded revisions.

**END OF ADDENDUM**

## ATTACHMENTS:

1. Electrical Drawing (1)
2. Electrical Sheets: E101, E102

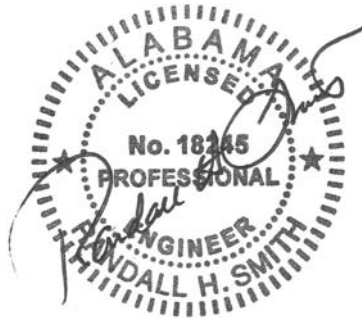

01/31/18



FIRE ALARM SYMBOLS



EXISTING WALL OUTLET, AUDIBLE VISUAL INDICATING DEVICE



EXISTING WALL OUTLET, VISUAL INDICATING DEVICE



WALL OUTLET, AUDIBLE VISUAL INDICATING DEVICE COMPATIBLE WITH EXISTING SYSTEM, DEVICE TO MATCH EXISTING, SYNCHRONIZED FLASH, 1'-4" AFF, 15 CANDELA OR AS INDICATED BY SUBSCRIPT




WALL OUTLET, VISUAL INDICATING DEVICE COMPATIBLE WITH EXISTING SYSTEM, DEVICE TO MATCH EXISTING, SYNCHRONIZED FLASH, 1'-4" AFF, 15 CANDELA OR AS INDICATED BY SUBSCRIPT



CEILING OUTLET, AUDIBLE VISUAL INDICATING DEVICE COMPATIBLE WITH EXISTING SYSTEM, DEVICE TO MATCH EXISTING, SYNCHRONIZED FLASH, 15 CANDELA OR AS INDICATED BY SUBSCRIPT

NOTES:

- THE CERTIFIED FIRE ALARM ACT REQUIRES:
  1. EVERY BUSINESS WHO INSTALLS FIRE ALARM SYSTEMS IN COMMERCIAL OCCUPANCIES MUST BE LICENSED AS A CERTIFIED FIRE ALARM CONTRACTOR. THE CONTRACTOR MUST HAVE A NICET LEVEL III TECHNICIAN IN A POSITION OF RESPONSIBILITY, AND THE LICENSE WILL BE ISSUED IN THE NAME OF THE CERTIFICATE HOLDER AND THE CONTRACTOR.
  2. TECHNICIANS WORKING FOR THE CERTIFIED CONTRACTOR MUST HOLD A CURRENT NICET LEVEL II, OR EQUIVALENT, CERTIFICATION. THE FIRE ALARM SPECIFICATIONS SHALL REQUIRE CONTRACTORS WISHING TO BID ON FIRE ALARM WORK TO SHOW EVIDENCE AT THE PRE-BID CONFERENCE THAT HE/ SHE MEETS THE CERTIFICATION REQUIREMENTS OF THE ACT AND HOLDS A PERMIT ISSUED BY THE STATE FIRE MARSHALL.
- THE FIRE ALARM SYSTEM WORK TO BE PERFORMED AS PER NFPA 72 (2013) 10.4 AND 10.5.2., SYSTEM TO BE CERTIFIED UPON COMPLETION OF WORK.
- THE FIRE ALARM SYSTEM SHALL BE MONITORED BY AN APPROVED SUPERVISING STATION IN ACCORDANCE WITH NFPA 72 (2013) (IFC 2015 907.6.6).




**Smith, Stegall**  
**& associates p.c.**  
◆  
**Consulting Engineers**

2110 Eighth Street ◆ Tuscaloosa, Alabama 35401  
Phone/Fax 205 345 4402 ◆ E-mail: info@RHSmithPC.com

CITY OF TUSCALOOSA  
DEPART. RENO. - PH 2

Revision#	1
Date:	01/31/18
Drawn By:	MSL
Sheet#	E001
Scale:	NO SCALE
Drawing#	1 OF 1

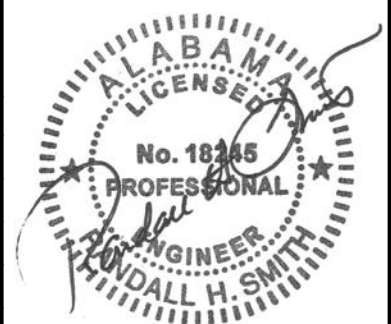

01/31/18

\*1744



