


DECK GUARD Synthetic Underlayment

MSA Deck Guard is a cost effective, synthetic steep-slope roofing underlayment. Designed as an alternative to asphalt saturated felt, the 4-layered product has a Polypropylene, non-woven top surface that provides enhanced walkability.

MSA Deck Guard is produced with preprinted lay lines and fastening points. Ten-square rolls provide more coverage per roll than traditional felt. Deck Guard allows up to a 60 day exposure.

MSA Deck Guard is packaged in a safe and efficient configuration for better warehouse management. The same printed material is used as an external pallet shroud providing easy identification in busy distribution centers.

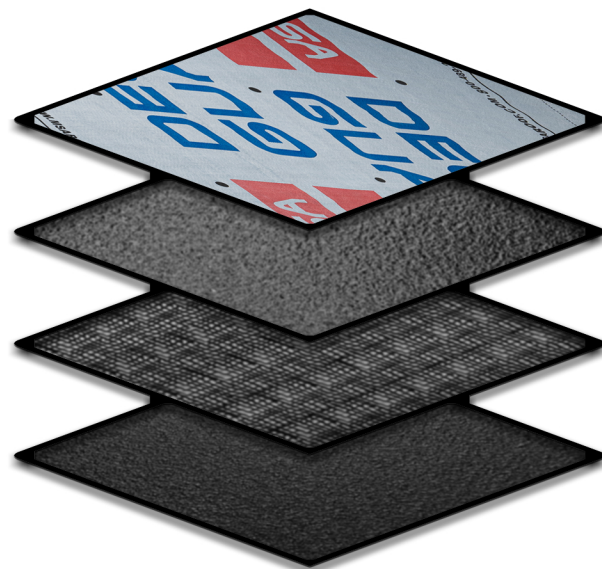

Codes & Compliances:

- Meets ICC-ES AC 188
- Meets ASTM D8257, mechanically attached polymeric roof underlayment used in steep slope roofing
- FBC Approved (FL# 17188)

Features:

- Non-woven top surface
- Sip-resistant bottom layer
- Stronger than traditional asphalt felt
- Zero bulking, cracking, or warping
- 60 day exposure to UV; AC 207

Technical Data:

PROPERTY	SPECIFICATION	TEST METHOD
Thickness	6 mil	ASTM D5261
Weight	85 gsm	ASTM D3776
Tensile Strength	40lbs MD 40lbs CD	ASTM D751
Tear Resistance	20lbs MD 20lbs CD	ASTM D4533
Vapor Permeability	0.06 perms	ASTM E96
Class A Fire	PASS	ASTM E108

Roll Dimension:

- 48" x 250 linear feet

