

HT PRO


HIGH-TEMP TEXTURED FILM SURFACE

QUICK-STICK HT PRO is an SBS-modified self-adhering membrane reinforced with non-woven fiberglass mat for superior strength, durability and easy application. **HT PRO's** textured film surface provides improved traction while working on the roof. **HT PRO** is designed for use in metal roof system applications. For use on decks 2:12 & greater.

Features and Benefits:

- Surfaced with a high-traction film walking surface
- Split-back release film reduces time of application
- Self-sealing around nails
- Designed to be installed directly to plywood, OSB, concrete decks, wood composition board, and gypsum*
- May be used in new construction or re-roofing
- Provides protection for critical areas such as rakes, eaves, valleys, flashings, hips, ridges, dormers, and skylights
- Offers greater tear resistance than traditional felt underlayment
- Provides excellent low temperature flexibility
- Service Temperature 250°F
- 180 Day exposure rating prior to application of finished roof

*Primer may be required for maximum adhesion to non-plywood materials

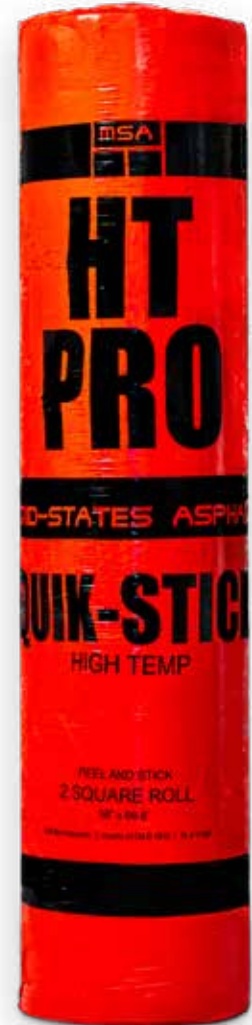

Specifications:

Reference ASTM	1970
Thickness, min	60 mils
Maximum Load, min	60 MD 50 CD
Elongation at Break, min	30%
Adhesion to Plywood @ 77 ° F min	30.0 lbs/ft
Thermal Stability, max	0.05
Flexibility Temp., @ -20 ° F min	PASS
Sealability around nail	PASS
Moisture Vapor Performance (US Perms)	<0.03
Waterproof Integrity after low temp. Flex	PASS
Waterproof Integrity of lap Seam	PASS
Slip Resistance	PASS
180-Day Exposure	PASS

Roll Breakdown:

Roll Dimensions 2SQ	36" x 66.8'
Gross Area	200 SF
Rolls / Pallet	25
Roll Weight	70 lbs ± 2 lbs

Applicable Standards:

ASTM D1970
 FL# 17401
 Miami-Dade Approved
 UL# R22025
 Nemo Cert: D6764540J
 MSA Item Code: HTPRO
 Roll UPC/GTIN-12: 791308000358
 Pallet GTIN-14: 10791308000355



"The secret to any good roof, is what's underneath it."

MID-STATES ASPHALT

1637 51st Avenue • Tuscaloosa, AL 35401 • Phone: 800-489-2391 • www.msarroof.com